




Decker Series

Architectural Floodlight

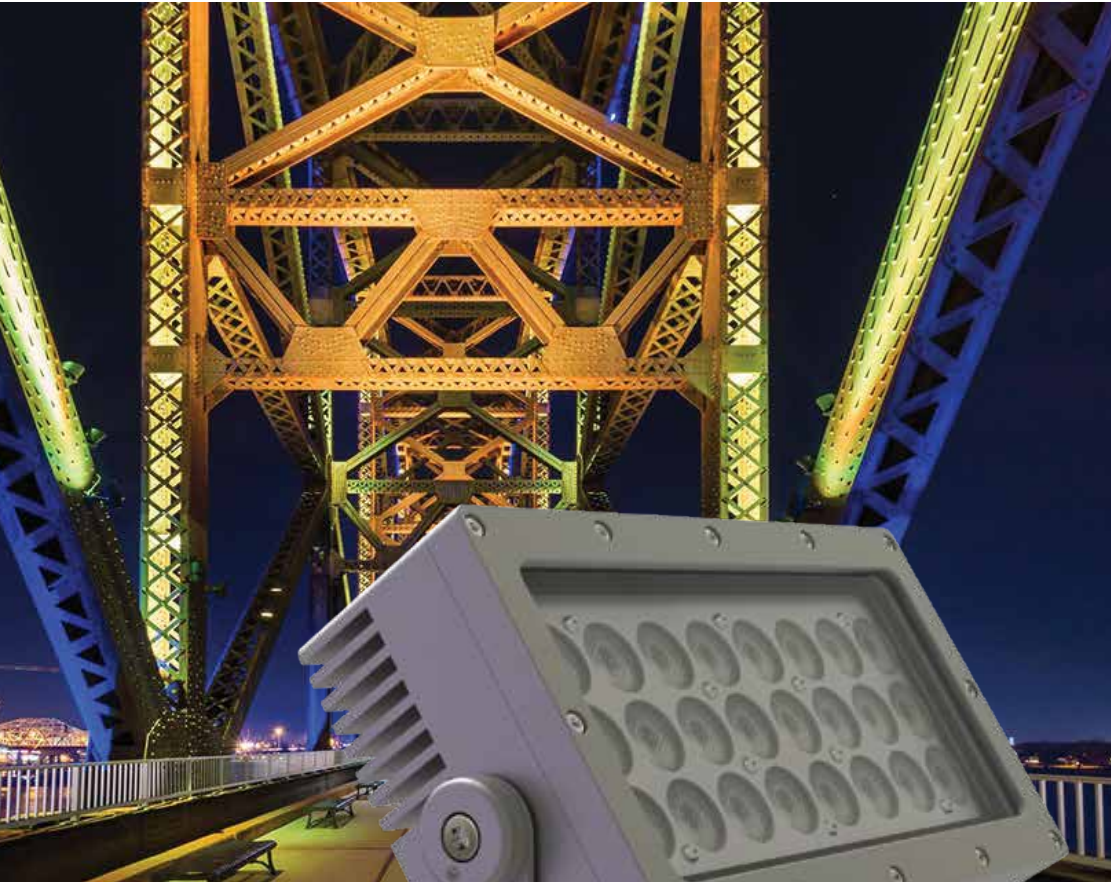


- Code Product: Decker Series
- Dimension: L327mm x W182mm x H152mm
- Input Voltage: 110-240VAC (43-60Hz)
- Power consumption: 150W, 200W
- Luminous Flux: 7500 at RGBW(W=3000K) at 200W
- Brand of LEDs: LED CREE
- Color: RGBW(W=5000K)
- Beam Angle: 20°x80° (3, 6, 10, 15, 24, 36, 45, 60, 20x40, 30x45)
- Function Dimmer: None
- Material: Aluminium
- Finishing (Color housing): Black
- IP Class: 67
- Electrical Class: I; Inrush Current Protection, Lightning Protection

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
Material PMMA
with UV protection
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests








Pending

IP67


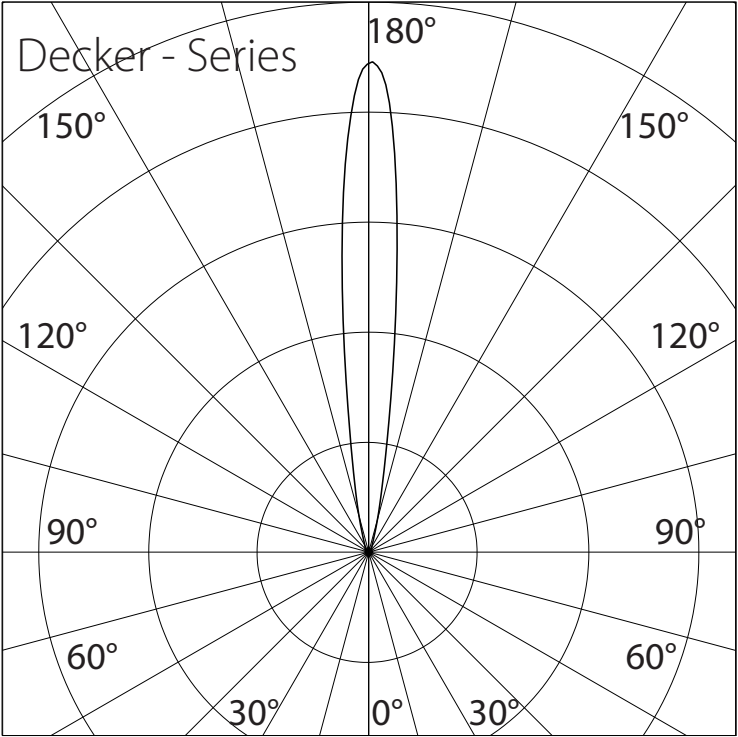


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

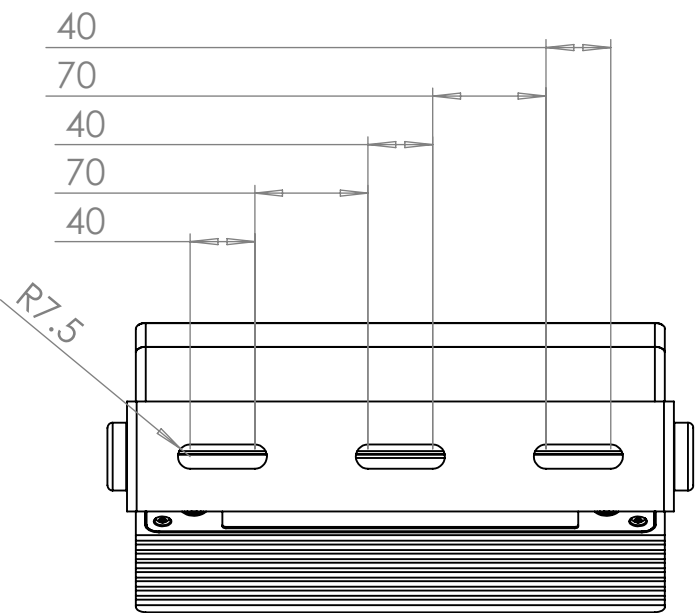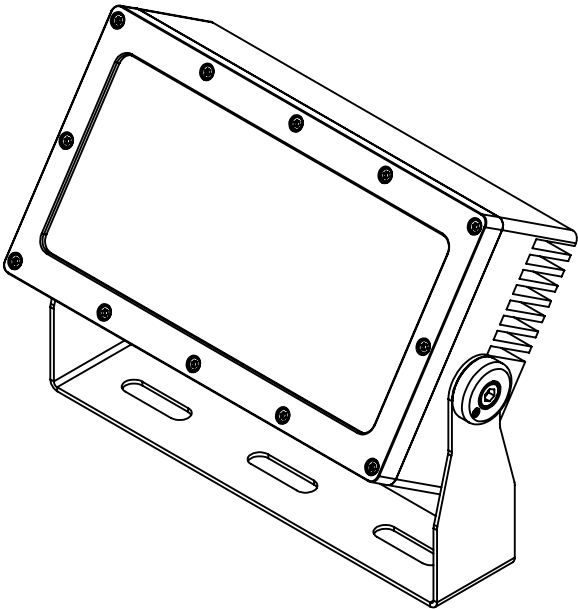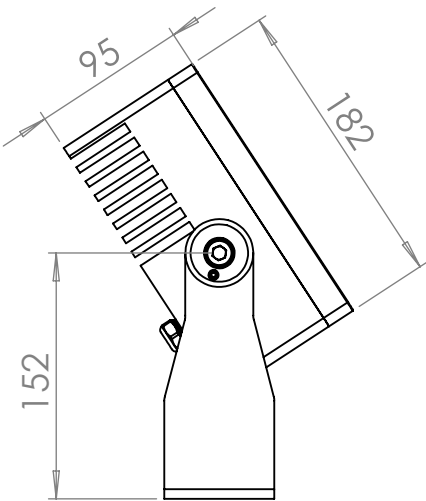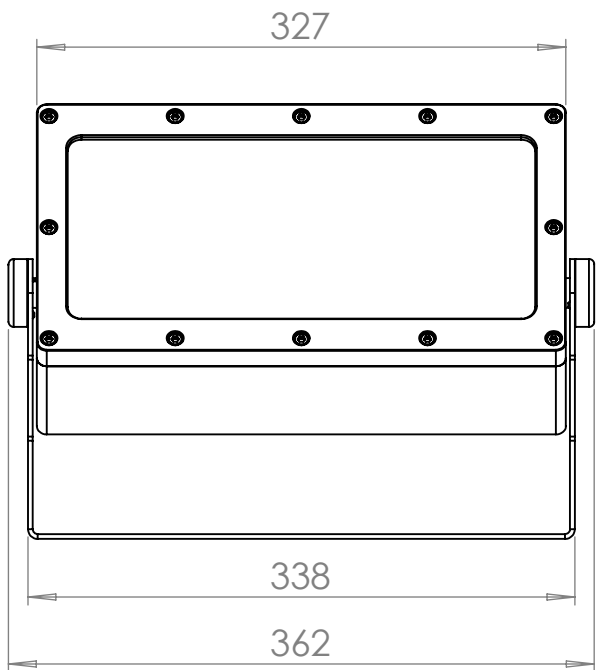


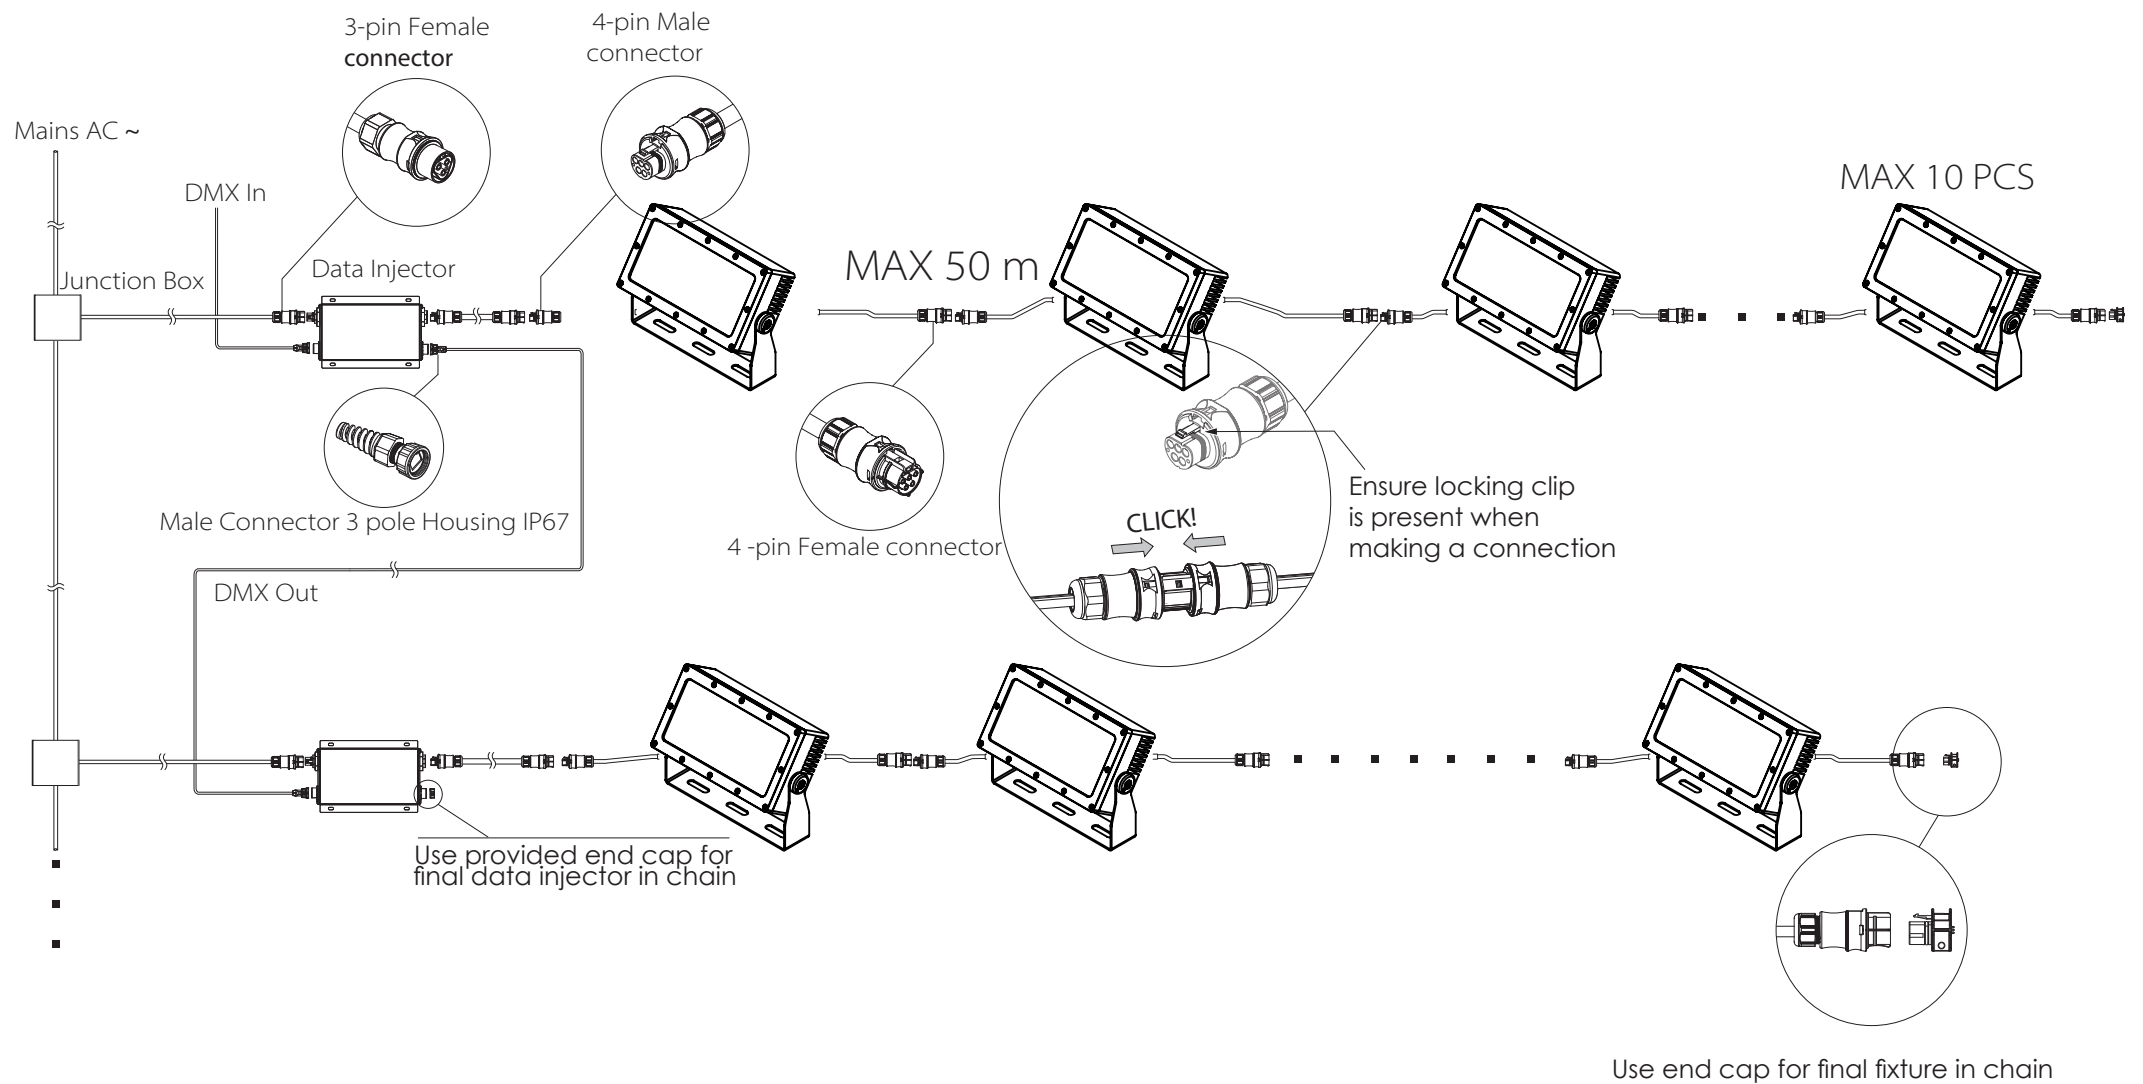

220VAC (50-60Hz)

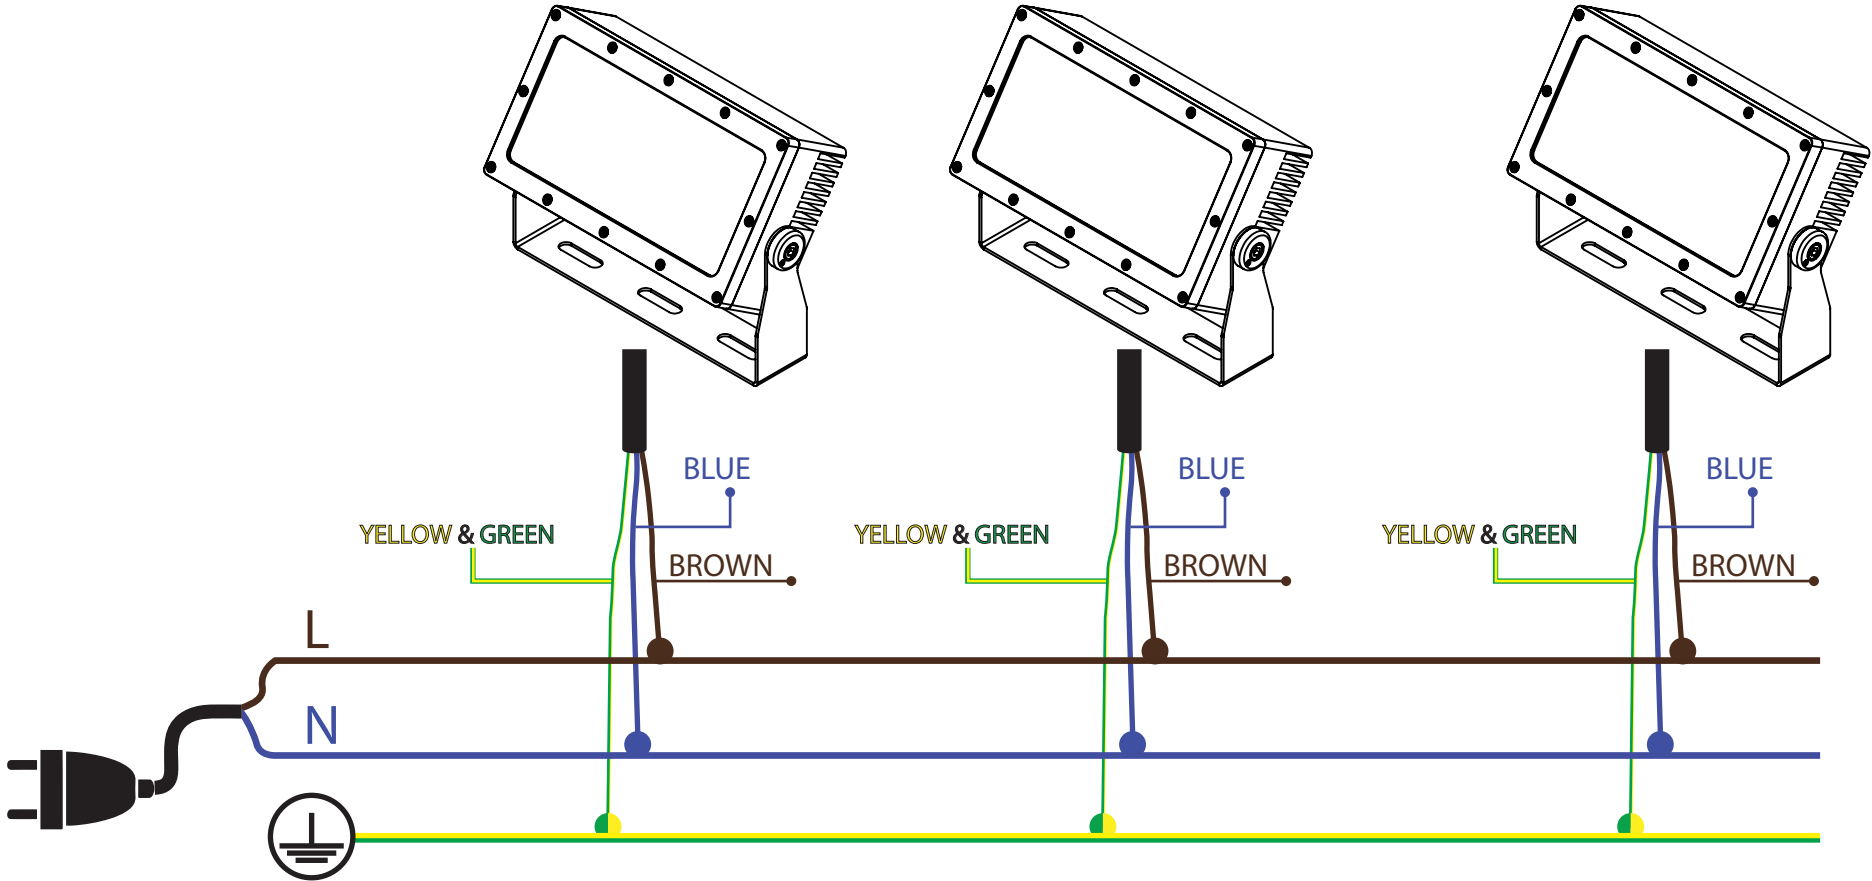



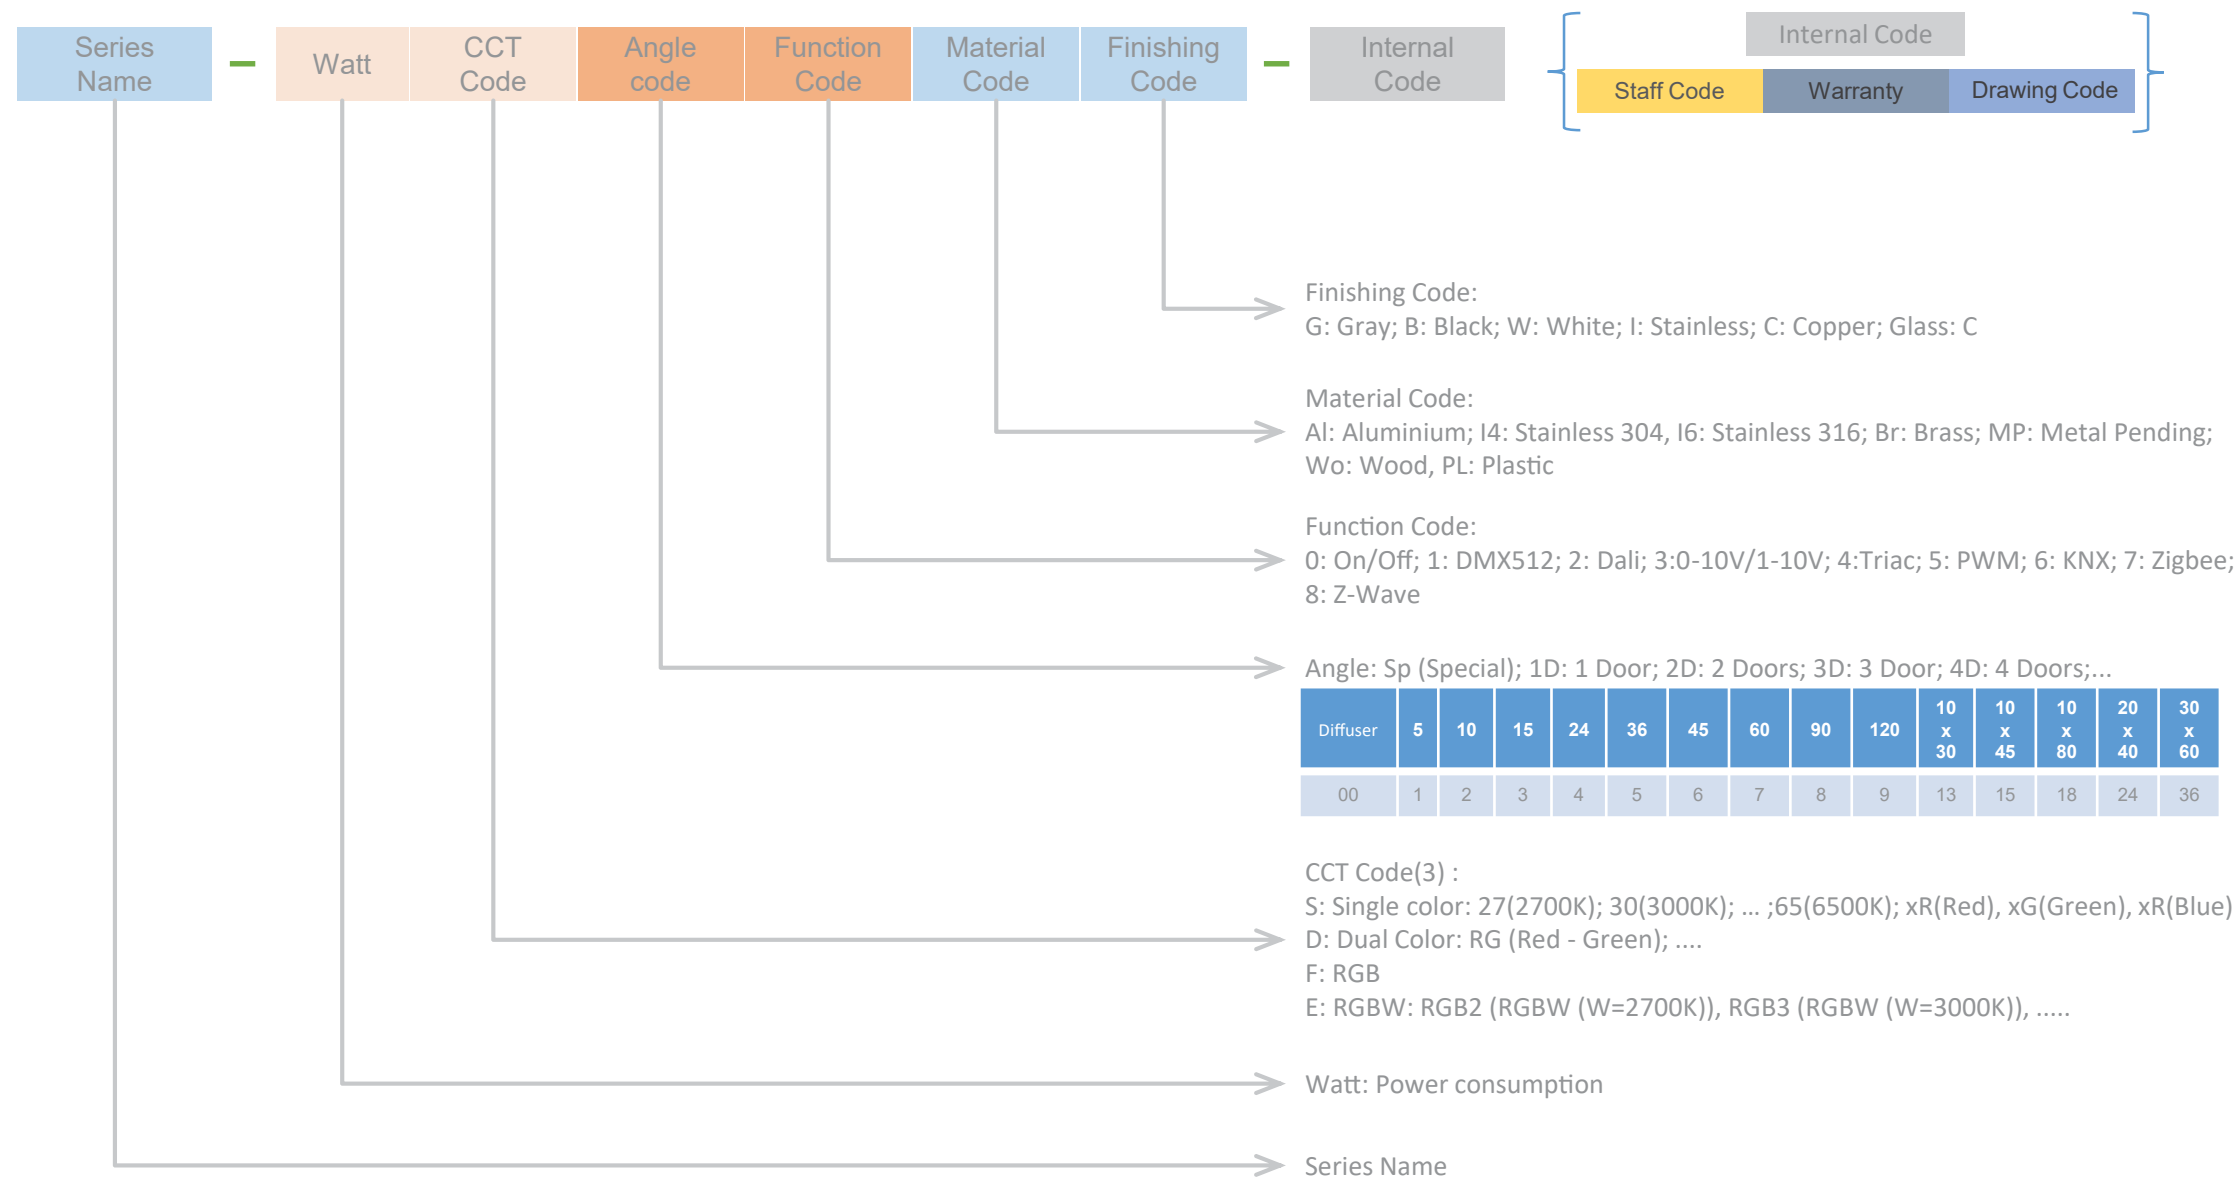



Width : 350 mm

Height : 250 mm

Length: 120 mm

Weight: 8.7kg



THANKS FOR YOUR
ATTENTION

//CONTACT US// TMTech Electronics Co., Ltd



Add: No.28, 10 Street, Linh Xuan Ward, Ho Chi Minh City,,VN



Tel: (+84)28.6283.7009

Hotline: (+84) 934.943.273



Email: support@tmtech.vn



Website: www.tmtech.vn